


一、 Main interface style

After the interface is opened, the tool is as shown in the figure:

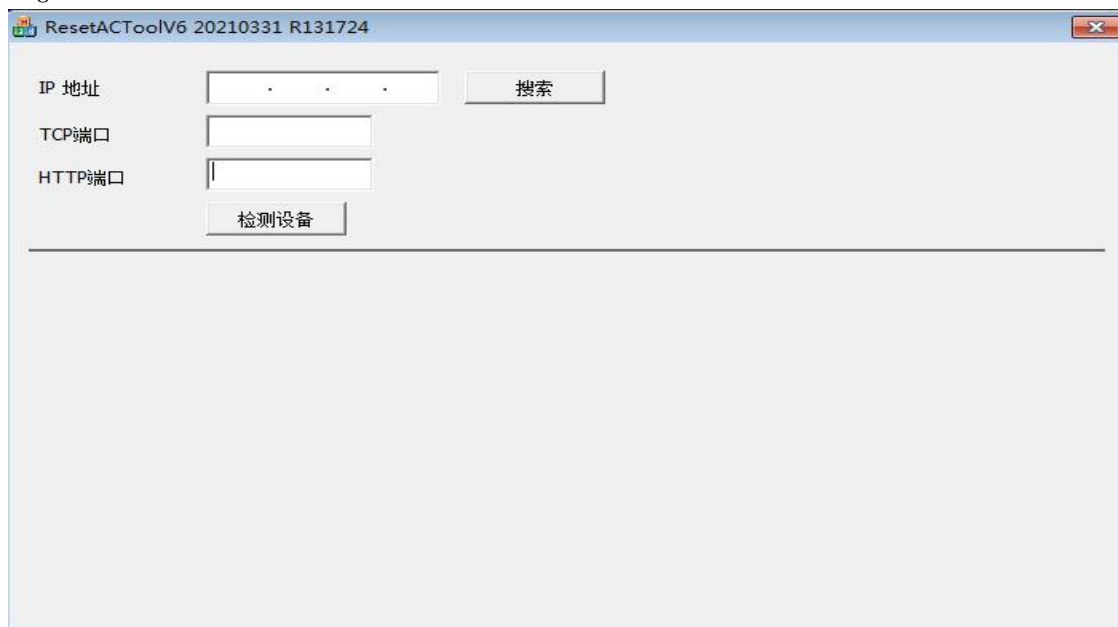

Initial operation interface


Description: This tool is used for DVR, NVR and IPC to recover user name password and modify device password

二、 Confirm reset password mode

Step 1: Fill in the device information

You can manually fill in the ip, tcp port and http port, or you can click search to select the specified device, and click OK to automatically fill in the ip, tcp port and http port.

NOTE: You must ensure that the entered IP address, HTTP port, and TCP port are all correct, otherwise the password cannot be reset.

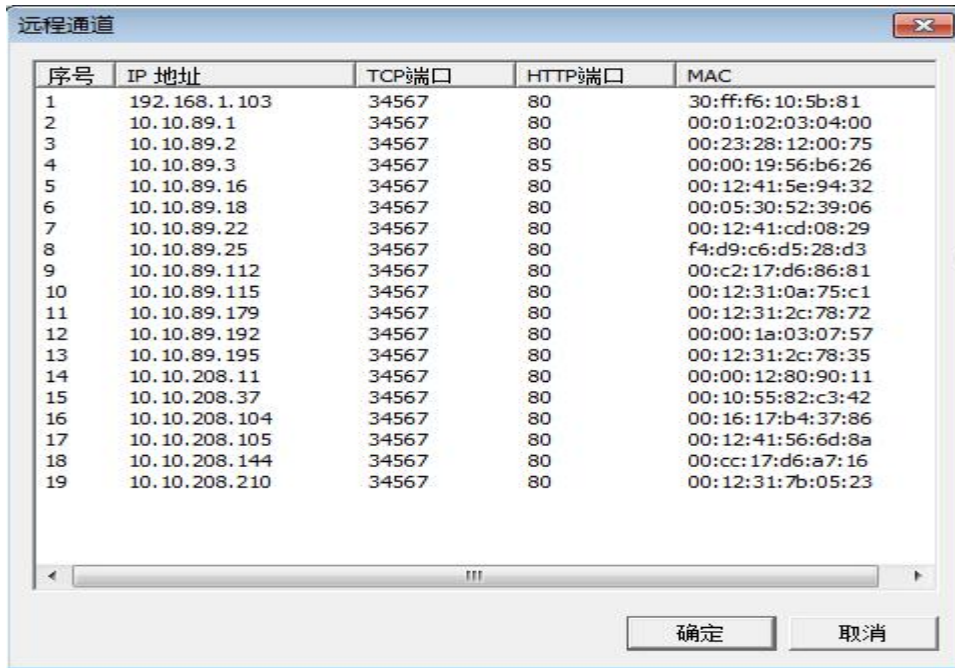

The screenshot shows a window titled '远程通道' (Remote Channel) with a table containing 19 rows of device information. The columns are '序号' (Serial Number), 'IP 地址' (IP Address), 'TCP端口' (TCP Port), 'HTTP端口' (HTTP Port), and 'MAC'. The data is as follows:

序号	IP 地址	TCP端口	HTTP端口	MAC
1	192.168.1.103	34567	80	30:ff:f6:10:5b:81
2	10.10.89.1	34567	80	00:01:02:03:04:00
3	10.10.89.2	34567	80	00:23:28:12:00:75
4	10.10.89.3	34567	85	00:00:19:56:b6:26
5	10.10.89.16	34567	80	00:12:41:5e:94:32
6	10.10.89.18	34567	80	00:05:30:52:39:06
7	10.10.89.22	34567	80	00:12:41:cd:08:29
8	10.10.89.25	34567	80	f4:d9:c6:d5:28:d3
9	10.10.89.112	34567	80	00:c2:17:d6:86:81
10	10.10.89.115	34567	80	00:12:31:0a:75:c1
11	10.10.89.179	34567	80	00:12:31:2c:78:72
12	10.10.89.192	34567	80	00:00:1a:03:07:57
13	10.10.89.195	34567	80	00:12:31:2c:78:35
14	10.10.208.11	34567	80	00:00:12:80:90:11
15	10.10.208.37	34567	80	00:10:55:82:c3:42
16	10.10.208.104	34567	80	00:16:17:b4:37:86
17	10.10.208.105	34567	80	00:12:41:56:6d:8a
18	10.10.208.144	34567	80	00:cc:17:d6:a7:16
19	10.10.208.210	34567	80	00:12:31:7b:05:23

Step 2: Check the device type:

Click the Detect Device button, and the tool will display the mobile **phone verification password reset mode** or **telnet to restore the default account mode** according to the actual situation of the device.

三、Mobile phone verification password reset mode

According to the difference of the client download mode, the authentication mode has the following two interfaces

1、 Authentication mode one:



Figure 3.1 Android and IOS clients use the same APP

2、 Authentication mode two:



Figure 3.2 Android and IOS clients use different apps

Operate according to the instructions in the prompt box on the right side of the figure above, get the verification code, and enter the verification code. Click the reset password button, The reset password function interface will pop up, as shown in Figure 3.3. Enter the password to be modified, and click the OK button to modify the device password.

重置密码

用户名

新密码

确认密码

Figure 3.3 Reset password

四、telnet restores the default account mode

telnet restores the default account mode. There are 3 types of equipment: new IPC, old IPC and old DVR; there are three modes as follows:

1、Ordinary account

Send the security code to the technical support (the security code will be different every time you click the check device button, so after sending the security code to the technical support, do not click the check device button again), ask the technical support to provide a temporary password, and then select the device Type and enter the temporary password, and click to restore the default account.

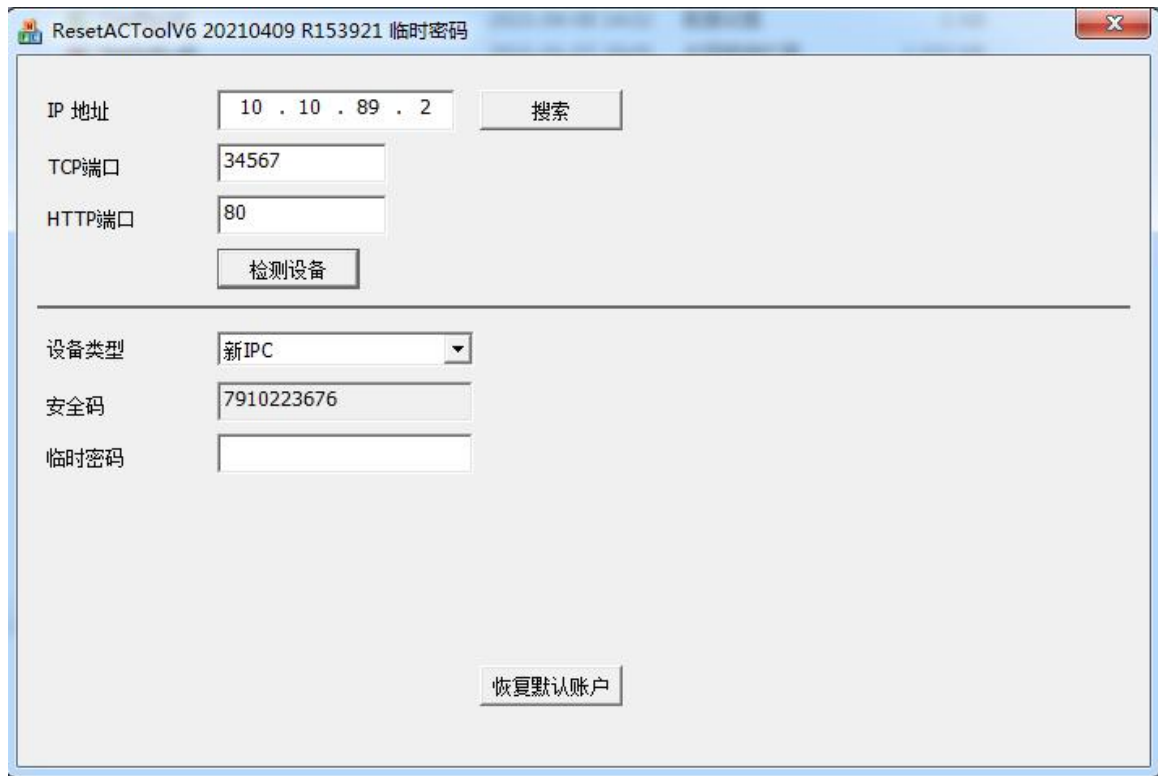


图 4.1